

F

E

D

C

B

A

F

E



D

C

B



A

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
B	A-2	NO.4 WAS CHANGED\RD-DM090420001\04-20-'20
B1	E-7	ADDED 0.85\N/A\05-07-'20
B2	C-6	NO.9'S DESIGN WAS CHANGED\RD-DM090903001\09-03-'20

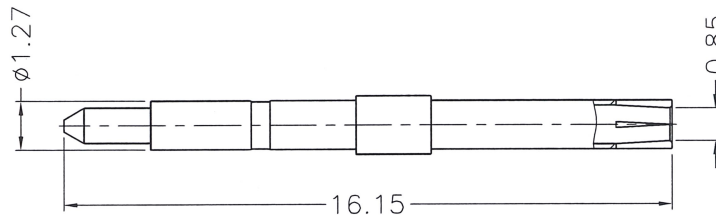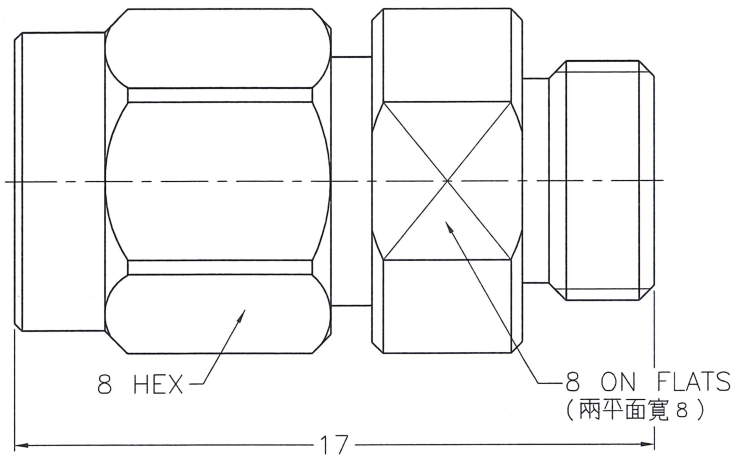

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS
2. BERYLLIUM COPPER
3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
4. GOLD PL. 10 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
5. STAINLESS STEEL
6. PASSIVATED
7. PTFE
8. NICKEL PL. 100 MIN. THICK OVER COPPER PL. 50 MIN. THICK

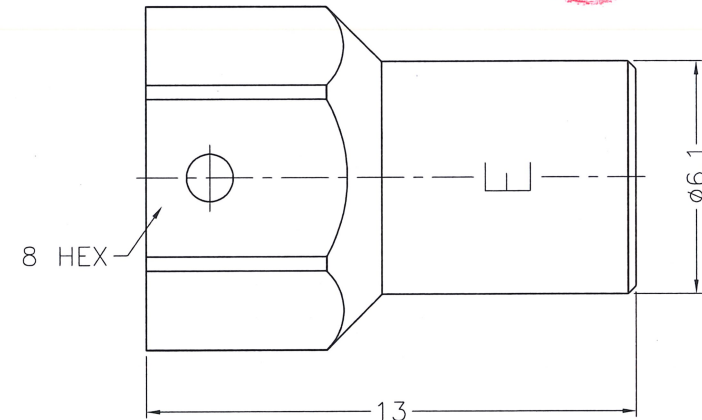

RoHS COMPLIANT

9	NUT	NOTE 5	NOTE 6		
8	BRAID HOLDER	NOTE 1	NOTE 3		
7	INSULATOR	NOTE 7	NATURAL		
6	SHELL	NOTE 5	NOTE 6		
5	GASKET	SILICONE	RED		
4	RETAINER RING	NOTE 2	NOTE 8		
3	INSULATOR	NOTE 7	NATURAL		
2	CONTACT PIN	NOTE 2	NOTE 4		
1	BODY	NOTE 5	NOTE 6		
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS			
UNLESS OTHERWISE SPECIFIED TOLERANCES			
0.5-6	=	±0.2	
6-30	=	±0.4	
30-120	=	±0.6	
120-315	=	±1	
315-1000	=	±1.6	
1000-2000	=	±2.4	

PART NO.	
APPROVED	DATE 09-03-'20
CHECKED	DATE 09-03-'20
DRAWN	DATE 09-03-'20

G.L.I.	
TITLE	SMA 26.5GHz SOLDER CLAMP PLUG (FOR .141, RG-402/U CABLE)
DRAWING NO.	1436-1181S12-29-50
FILE NO.	R:\D\DWG\1436\1181S12\29\50-B2