



F  
E  
D  
C  
B  
A

12345678





| REVISIONS |      |                                                                       |  |
|-----------|------|-----------------------------------------------------------------------|--|
| ISS       | ZONE | DESCRIPTION\PER REQUEST\DATE                                          |  |
| A         | A-7  | 1436-6411U5-31C-50 WAS 1436-6411U5-31-50<br>\RD-DM090806002\08-06-'20 |  |

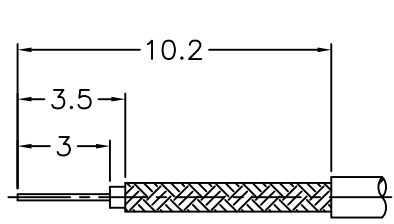

RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)



RECOMMENDED  
MOUNTING HOLE  
(建議架設孔)

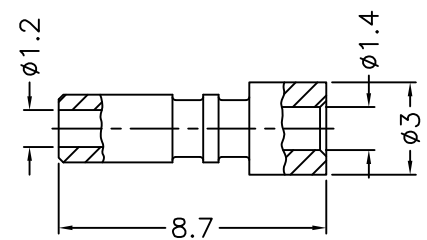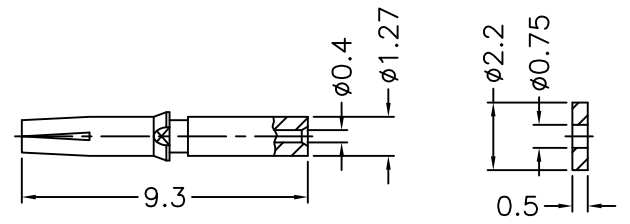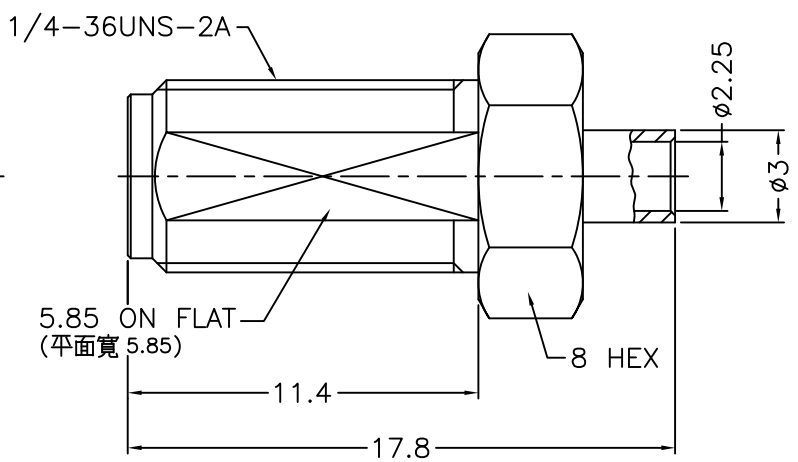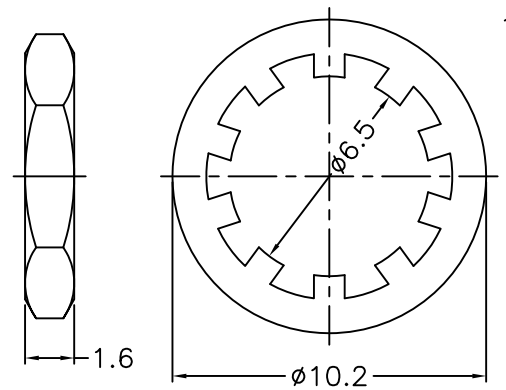

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)  
1. BRASS  
2. THIN GOLD OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK  
3. BERYLLIUM COPPER  
4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK  
5. PTFE

1. CRIMPED FERRULE  
HEX CRIMP SIZE .1"  
2. CONTACT PIN TO SOLDER  
3. MAX. PANEL THICKNESS=3.2mm

RoHS COMPLIANT

|     |             |          |         |      |             | DIMENSIONS ARE IN MILLIMETERS                                                                                                                |     |       |   | PART NO.  |  | G.L.I.                        |  |
|-----|-------------|----------|---------|------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------|-----|-------|---|-----------|--|-------------------------------|--|
| 7   | HEX NUT     | NOTE 1   | NOTE 2  |      |             | UNLESS OTHERWISE SPECIFIED TOLERANCES<br>0.5-6 = ±0.2<br>6-30 = ±0.4<br>30-120 = ±0.6<br>120-315 = ±1<br>315-1000 = ±1.6<br>1000-2000 = ±2.4 |     |       |   | APPROVED  |  | TITLE                         |  |
| 6   | LOCK WASHER | NOTE 1   | NOTE 2  |      |             |                                                                                                                                              |     |       |   | DATE      |  | SMA BULKHEAD JACK             |  |
| 5   | FERRULE     | NOTE 1   | NOTE 2  |      |             |                                                                                                                                              |     |       |   | 08-06-'20 |  | (FOR 1.32 O.D DB MICRO-CABLE) |  |
| 4   | INSULATOR   | NOTE 5   | NATURAL |      |             |                                                                                                                                              |     |       |   | CHECKED   |  | DRAWING NO.                   |  |
| 3   | CONTACT PIN | NOTE 3   | NOTE 4  |      |             |                                                                                                                                              |     |       |   | DATE      |  | 1436-6411U5-31C-50            |  |
| 2   | INSULATOR   | NOTE 5   | NATURAL |      |             | SCALE 4/1 ISSUE A                                                                                                                            |     |       |   | DRAWN     |  | FILE NO.                      |  |
| 1   | BODY        | NOTE 1   | NOTE 2  |      |             |                                                                                                                                              |     |       |   | DATE      |  | R:\D\DWG\1436\6411U5\31C\50   |  |
| NO. | DESCRIPTION | MATERIAL | FINISH  | Q'TY | DRAWING NO. | SCALE                                                                                                                                        | 4/1 | ISSUE | A | 08-06-'20 |  |                               |  |

12345678