

F

E

D

C

B

A

F

E


D

C





B

A

REVISIONS				
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE		



RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

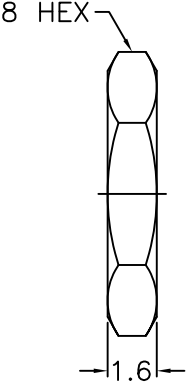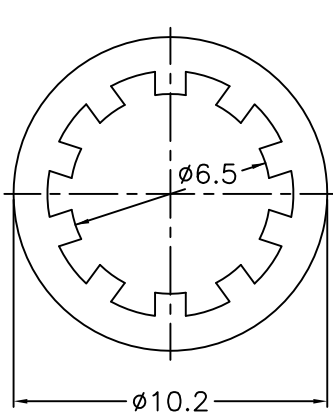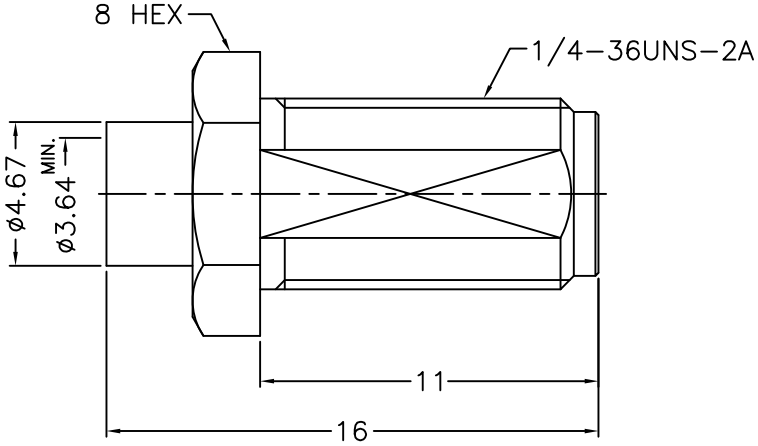

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS
2. THIN GOLD OVER NICKEL PL. 50 MIN. THICK OVER COPPER
PL. 50 MIN. THICK
3. BERYLLIUM COPPER
4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK
OVER COPPER PL. 50 MIN. THICK
5. TEFLON

1. CONTACT PIN TO SOLDER

5	HEX NUT	NOTE 1	NOTE 2	1	HN-8-1436-16	DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				PART NO.		G.L.I.				
4	LOCK WASHER	NOTE 1	NOTE 2	1	LW-65-102-05											
3	CONTACT PIN	NOTE 3	NOTE 4	1	1436-6581A1-3 -1.0					APPROVED				DATE 02-20-'13	TITLE SMA DIRECT SOLDER BULKHEAD JACK (FOR .141 SEMI-RIGID, RG-402/U)	
2	INSULATOR	NOTE 5	NATURAL	1	1436-6481A1-2 -50T					CHECKED				DATE 02-20-'13		DRAWING NO. 1436-6481A4-29-50
1	BODY	NOTE 1	NOTE 2	1	1436-6481A4-1 -29					DRAWN ANGELA				DATE 02-20-'13		FILE NO. R:\D\G\DWG\1436\6481A4\29\50
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	4/1	ISSUE	A							