
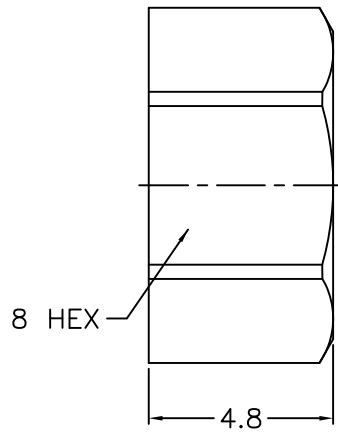
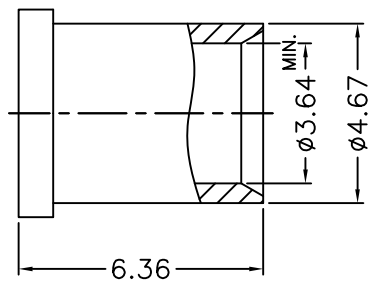


F
E
D
C
B
A

12345678

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

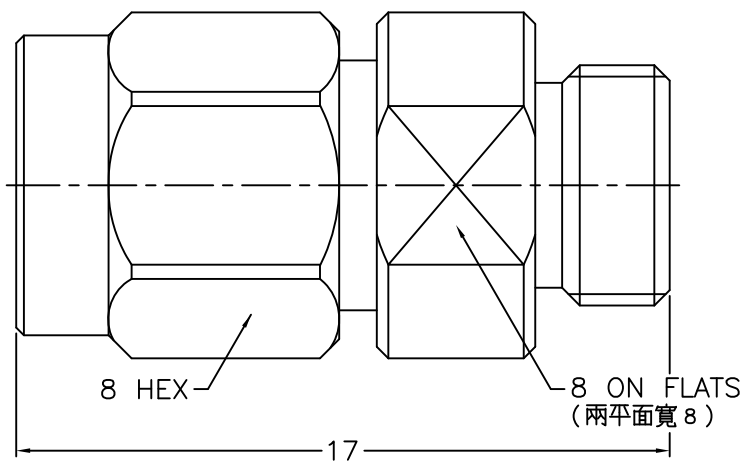

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- 1. BRASS
 - 2. BERYLLIUM COPPER
 - 3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
 - 4. GOLD PL. 10 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
 - 5. STAINLESS STEEL
 - 6. PASSIVATED
 - 7. ULTEM 1000
 - 8. PTFE

RoHS COMPLIANT

9	NUT	NOTE 5	NOTE 6			ROHS COMPLIANT																			
8	BRAID HOLDER	NOTE 1	NOTE 3			DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				PART NO.				G.L.I.											
7	INSULATOR	NOTE 8	NATURAL																						
6	SHELL	NOTE 5	NOTE 6							APPROVED				DATE 04-10-'20				TITLE 2.92mm DIRECT SOLDER PLUG (FOR .141, RG-402/U CABLE)							
5	RETAINER RING	SUS 304	NOTE 6							CHECKED				DATE 04-10-'20											
4	RING	NOTE 5	NOTE 6							DRAWN				DATE 04-10-'20				DRAWING NO. 292-1181S1-29-50							
3	INSULATOR	NOTE 7	NATURAL			ALAN				04-10-'20															
2	CONTACT PIN	NOTE 2	NOTE 4																						
1	BODY	NOTE 5	NOTE 6																						
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	5/1	ISSUE	3					FILE NO. R:\D\DWG\292\1181S1\29\50-3											

12345678