


F
E
D
C
B
A

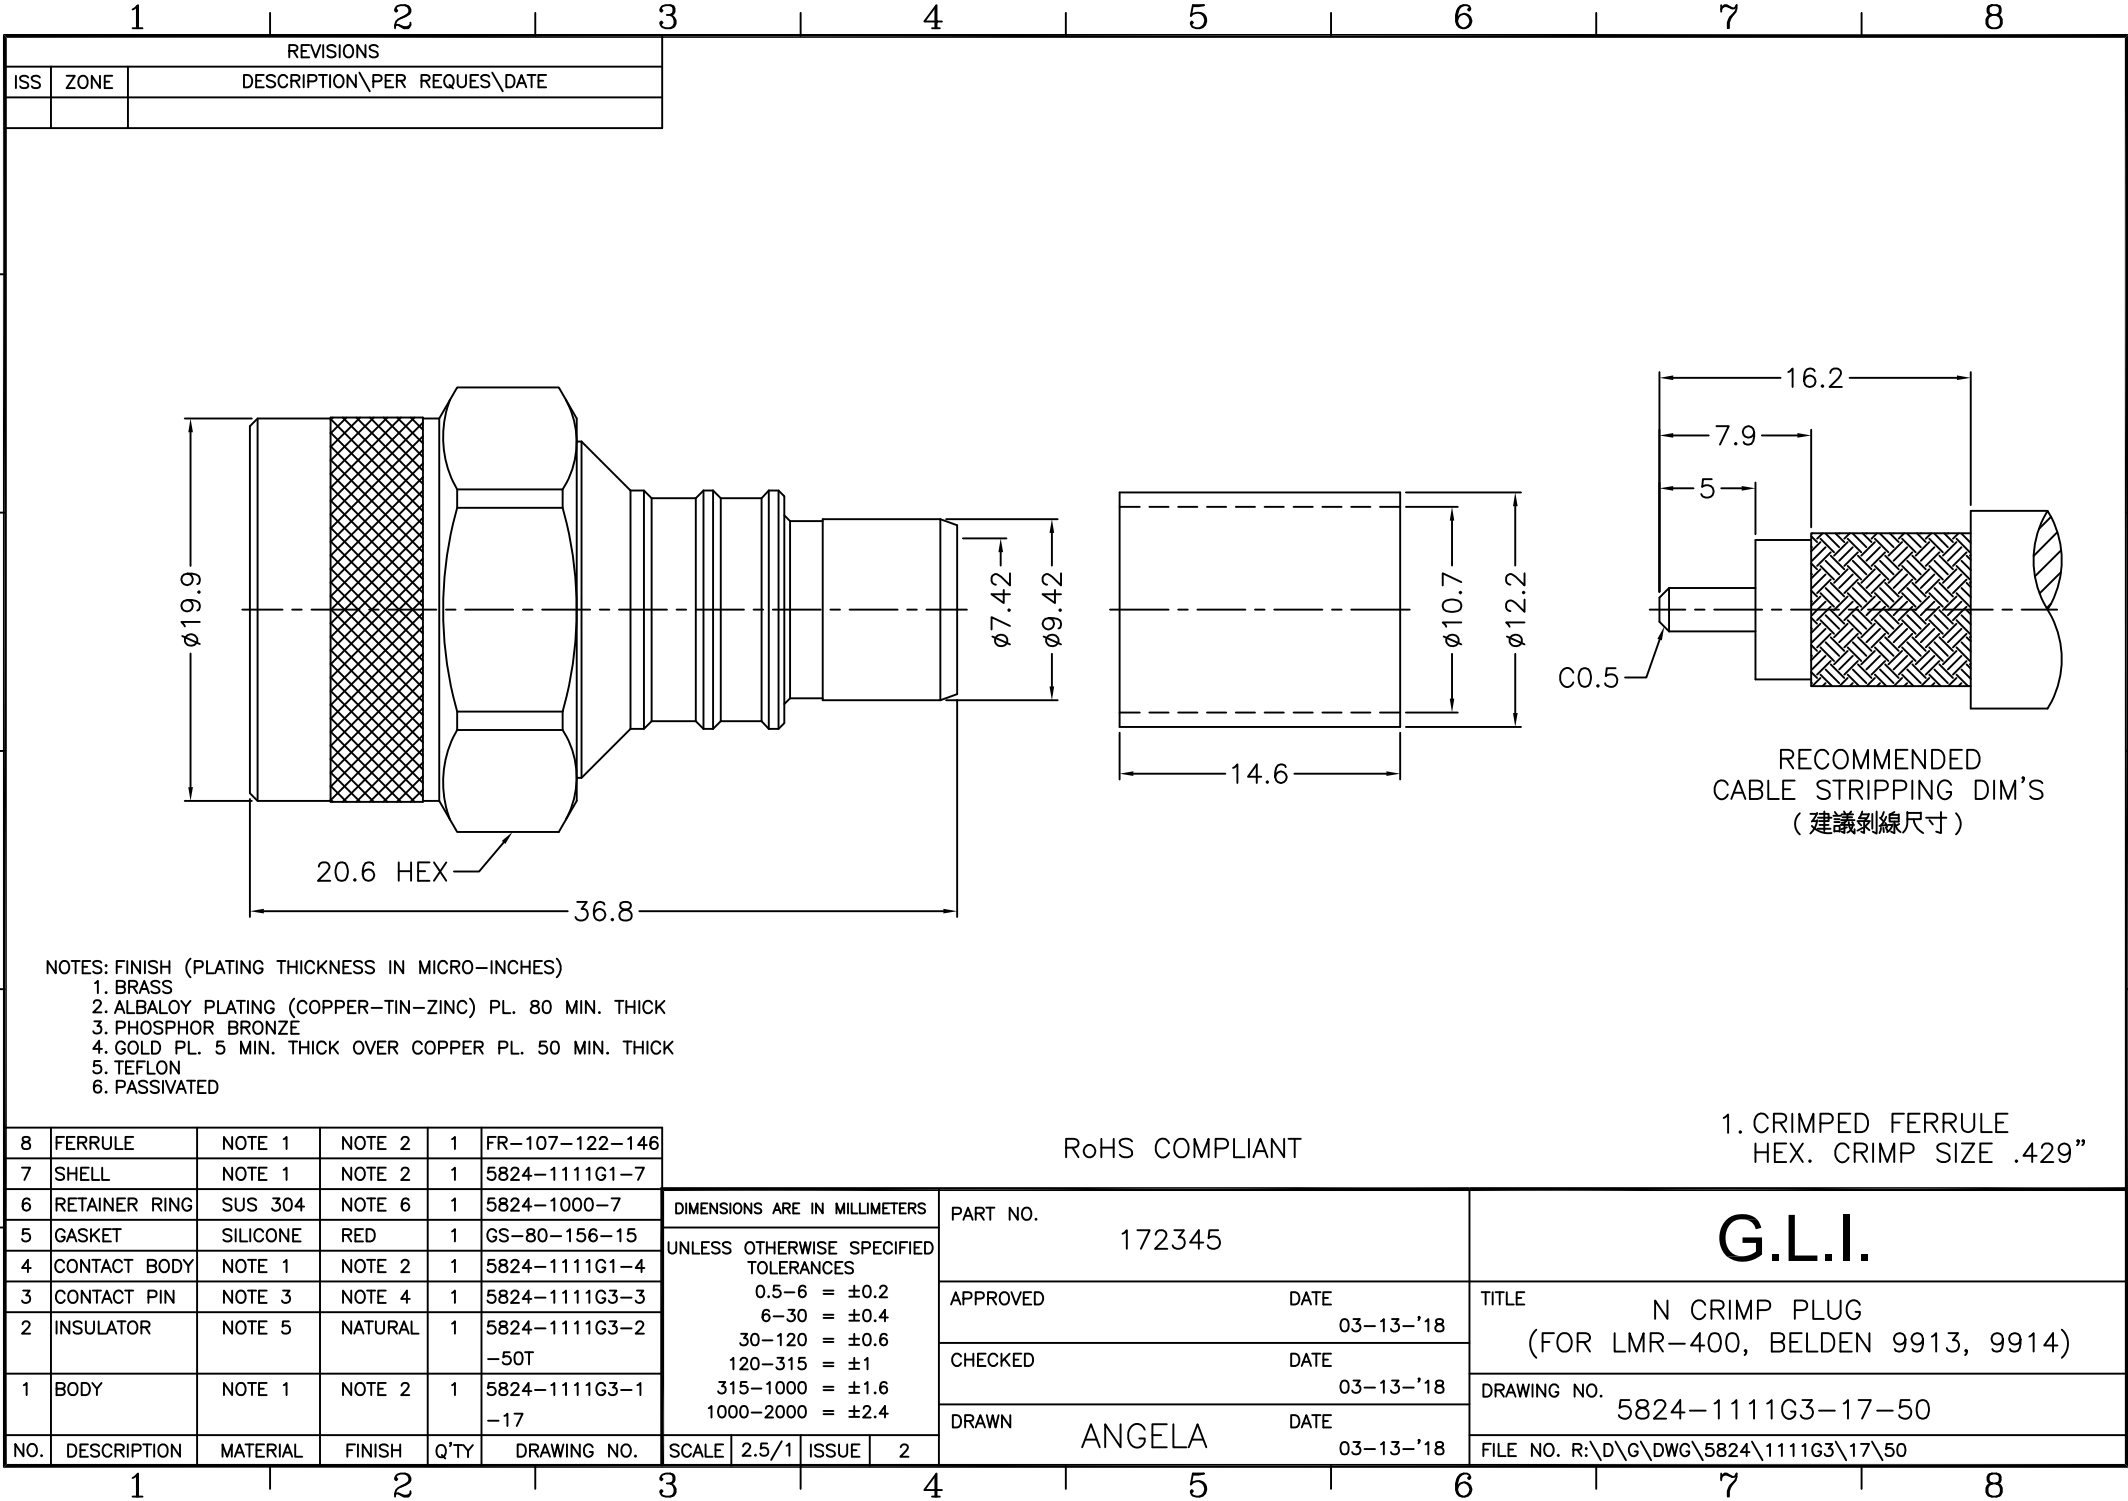

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS
2. ALBALOY PLATING (COPPER-TIN-ZINC) PL. 80 MIN. THICK
3. PHOSPHOR BRONZE
4. GOLD PL. 5 MIN. THICK OVER COPPER PL. 50 MIN. THICK
5. TEFLON
6. PASSIVATED

8	FERRULE	NOTE 1	NOTE 2	1	FR-107-122-146
7	SHELL	NOTE 1	NOTE 2	1	5824-1111G1-7
6	RETAINER RING	SUS 304	NOTE 6	1	5824-1000-7
5	GASKET	SILICONE	RED	1	GS-80-156-15
4	CONTACT BODY	NOTE 1	NOTE 2	1	5824-1111G1-4
3	CONTACT PIN	NOTE 3	NOTE 4	1	5824-1111G3-3
2	INSULATOR	NOTE 5	NATURAL	1	5824-1111G3-2 -50T
1	BODY	NOTE 1	NOTE 2	1	5824-1111G3-1 -17
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS			
UNLESS OTHERWISE SPECIFIED TOLERANCES			
0.5-6 = ± 0.2			
6-30 = ± 0.4			
30-120 = ± 0.6			
120-315 = ± 1			
315-1000 = ± 1.6			
1000-2000 = ± 2.4			
SCALE	2.5/1	ISSUE	2

PART NO.		172345	
APPROVED		DATE 03-13-'18	
CHECKED		DATE 03-13-'18	
DRAWN ANGELA		DATE 03-13-'18	

G.L.I.	
TITLE N CRIMP PLUG (FOR LMR-400, BELDEN 9913, 9914)	
DRAWING NO. 5824-1111G3-17-50	
FILE NO. R:\D\G\DWG\5824\1111G3\17\50	

1 2 3 4 5 6 7 8

1 2 3 4 5 6 7 8