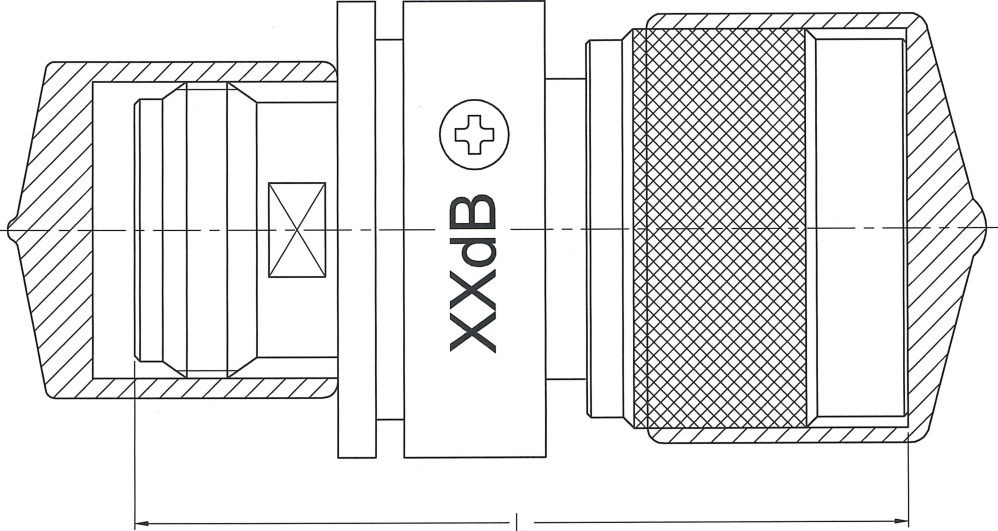


1			2			3			4			5			6			7			8																																																																																																												
REVISIONS																																																																																																																																	
ISS		ZONE		DESCRIPTION\PER REQUEST\DATE																																																																																																																													
A1		D-1		ADDED TABLE\N/A\08-06-'15																																																																																																																													
5824AT-5071B1-XX XX X																																																																																																																																	
GHz dB Watt																																																																																																																																	
<table><tr><td>FREQUENCY RANGE</td><td>L</td></tr><tr><td>1 - 12 dB</td><td>41</td></tr><tr><td>15 - 40 dB</td><td>43.5</td></tr></table>																		FREQUENCY RANGE	L	1 - 12 dB	41	15 - 40 dB	43.5																																																																																																										
FREQUENCY RANGE	L																																																																																																																																
1 - 12 dB	41																																																																																																																																
15 - 40 dB	43.5																																																																																																																																
NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES) 1. BRASS 2. ALBALOY (COPPER-TIN-ZINC) 3. GOLD 4. TEFLON 5. PHOSPHOR BRONZE																																																																																																																																	
RoHS COMPLIANT																																																																																																																																	
<table><tr><td>9</td><td>PROTECTIVE COVER</td><td></td><td>BLACK</td><td></td><td></td></tr><tr><td>8</td><td>PROTECTIVE COVER</td><td></td><td>BLACK</td><td></td><td></td></tr><tr><td>7</td><td>RING</td><td>NOTE 1</td><td>BLACK</td><td></td><td></td></tr><tr><td>6</td><td>CONTACT PIN</td><td>NOTE 5</td><td>NOTE 3</td><td></td><td></td></tr><tr><td>5</td><td>GASKET</td><td>SILICONE</td><td>RED</td><td></td><td></td></tr><tr><td>4</td><td>RETAINER RING</td><td>SUS 304</td><td>NATURAL</td><td></td><td></td></tr><tr><td>3</td><td>INSULATOR</td><td>NOTE 4</td><td>NATURAL</td><td></td><td></td></tr><tr><td>2</td><td>BODY</td><td>NOTE 1</td><td>NOTE 2</td><td></td><td></td></tr><tr><td>1</td><td>SHELL</td><td>NOTE 1</td><td>NOTE 2</td><td></td><td></td></tr></table><table><tr><td colspan="2">DIMENSIONS ARE IN MILLIMETERS</td><td colspan="2">PART NO.</td><td colspan="2">G.L.I.</td></tr><tr><td colspan="2">UNLESS OTHERWISE SPECIFIED TOLERANCES</td><td colspan="2">APPROVED</td><td colspan="2">TITLE</td></tr><tr><td colspan="2">0.5-6 = ±0.2</td><td colspan="2">DATE</td><td colspan="2">N PLUG TO JACK FIXED ATTENUATOR</td></tr><tr><td colspan="2">6-30 = ±0.4</td><td colspan="2">DATE</td><td colspan="2">DRAWING NO.</td></tr><tr><td colspan="2">30-120 = ±0.6</td><td colspan="2">DATE</td><td colspan="2">5824AT-5071B1</td></tr><tr><td colspan="2">120-315 = ±1</td><td colspan="2">DATE</td><td colspan="2">FILE NO.</td></tr><tr><td colspan="2">315-1000 = ±1.6</td><td colspan="2">DATE</td><td colspan="2">R:\D\G\DWG\5824\AT\5071B1</td></tr><tr><td colspan="2">1000-2000 = ±2.4</td><td colspan="2">DATE</td><td colspan="2"></td></tr></table><table><tr><td>NO.</td><td>DESCRIPTION</td><td>MATERIAL</td><td>FINISH</td><td>Q'TY</td><td>DRAWING NO.</td><td>SCALE</td><td>2.5/1</td><td>ISSUE</td><td>A1</td></tr></table>																		9	PROTECTIVE COVER		BLACK			8	PROTECTIVE COVER		BLACK			7	RING	NOTE 1	BLACK			6	CONTACT PIN	NOTE 5	NOTE 3			5	GASKET	SILICONE	RED			4	RETAINER RING	SUS 304	NATURAL			3	INSULATOR	NOTE 4	NATURAL			2	BODY	NOTE 1	NOTE 2			1	SHELL	NOTE 1	NOTE 2			DIMENSIONS ARE IN MILLIMETERS		PART NO.		G.L.I.		UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVED		TITLE		0.5-6 = ±0.2		DATE		N PLUG TO JACK FIXED ATTENUATOR		6-30 = ±0.4		DATE		DRAWING NO.		30-120 = ±0.6		DATE		5824AT-5071B1		120-315 = ±1		DATE		FILE NO.		315-1000 = ±1.6		DATE		R:\D\G\DWG\5824\AT\5071B1		1000-2000 = ±2.4		DATE				NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	2.5/1	ISSUE	A1
9	PROTECTIVE COVER		BLACK																																																																																																																														
8	PROTECTIVE COVER		BLACK																																																																																																																														
7	RING	NOTE 1	BLACK																																																																																																																														
6	CONTACT PIN	NOTE 5	NOTE 3																																																																																																																														
5	GASKET	SILICONE	RED																																																																																																																														
4	RETAINER RING	SUS 304	NATURAL																																																																																																																														
3	INSULATOR	NOTE 4	NATURAL																																																																																																																														
2	BODY	NOTE 1	NOTE 2																																																																																																																														
1	SHELL	NOTE 1	NOTE 2																																																																																																																														
DIMENSIONS ARE IN MILLIMETERS		PART NO.		G.L.I.																																																																																																																													
UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVED		TITLE																																																																																																																													
0.5-6 = ±0.2		DATE		N PLUG TO JACK FIXED ATTENUATOR																																																																																																																													
6-30 = ±0.4		DATE		DRAWING NO.																																																																																																																													
30-120 = ±0.6		DATE		5824AT-5071B1																																																																																																																													
120-315 = ±1		DATE		FILE NO.																																																																																																																													
315-1000 = ±1.6		DATE		R:\D\G\DWG\5824\AT\5071B1																																																																																																																													
1000-2000 = ±2.4		DATE																																																																																																																															
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	2.5/1	ISSUE	A1																																																																																																																								
1			2			3			4			5			6			7			8																																																																																																												