


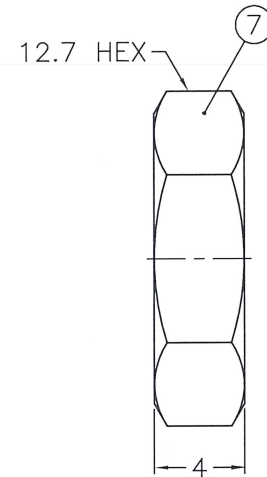


| REVISIONS |      |                                                      |
|-----------|------|------------------------------------------------------|
| ISS       | ZONE | DESCRIPTION\PER REQUEST\DATE                         |
| B         | A-2  | CORRECTED NO.6'S MATERIAL\RD-DM020506003\05-06-'13   |
| B1        | D-4  | BRAID GROUNDING'S LENGTH WAS CHANGED\N/A\11-01-'17   |
| B2        | D-2  | VIEW WAS CHANGED\N/A\05-31-'19                       |
| B3        | A-1  | NO.3, 4'S MATERIAL WERE CHANGED\N/A\07-30-'19        |
| C         | A-1  | NO.4'S MATERIAL WAS CHANGED\RD-DM100426002\04-26-'21 |
| C1        | A-1  | ADDED PROCESS\N/A\08-02-'22                          |

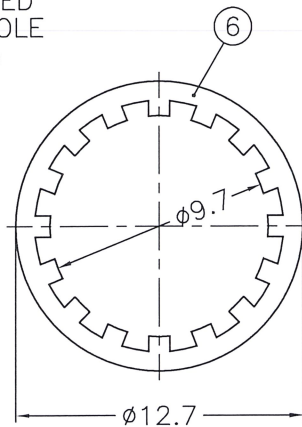

RECOMMENDED  
MOUNTING HOLE  
(建議架設孔)

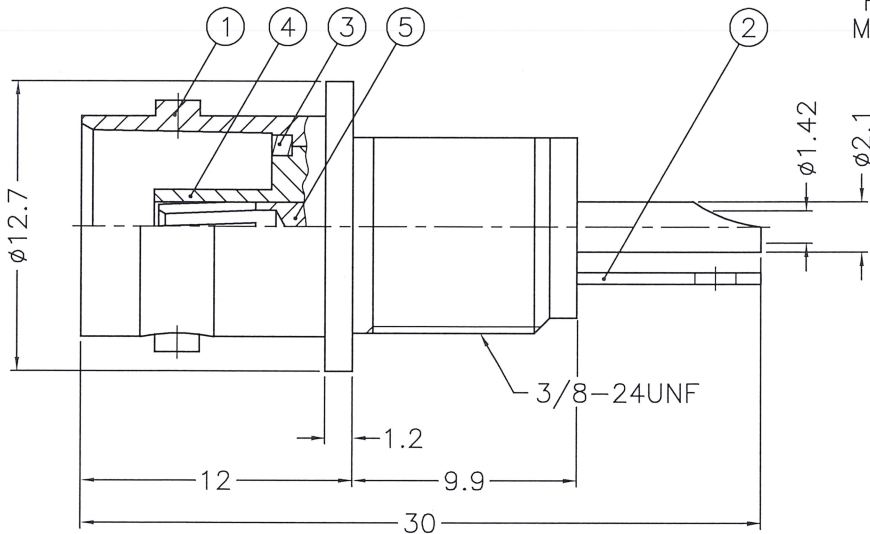

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)  
1. BRASS  
2. NICKEL  
3. PHOSPHOR BRONZE  
4. GOLD  
5. BRIGHT TIN

1. MAX. PANEL THICKNESS=3.2mm

RECOMMENDED TORQUE: A MAXIMUM TORQUE OF  
12 INCH-LBS MAY BE APPLIED  
ON HEX NUT WHEN MOUNTING  
CONNECTOR IN PANEL.  
(建議扭力:當架設接頭於基板時 六角螺母最大適用 12 inch-lbs 的扭力)



RoHS COMPLIANT

|     |                 |          |        |      |                |
|-----|-----------------|----------|--------|------|----------------|
| 7   | HEX NUT         | NOTE 1   | NOTE 2 | 1    | HN-127-3824-40 |
| 6   | LOCK WASHER     | S50C     | NOTE 2 | 1    | LW-97-126-05   |
| 5   | CONTACT PIN     | NOTE 3   | NOTE 4 | 1    | 900-6651B2-5   |
| 4   | INSULATOR       | PBT      | WHITE  | 1    | 900-6651B2-75  |
| 3   | LOCK RING       | SS41     | NOTE 2 | 1    | -X1            |
| 2   | BRAID GROUNDING | NOTE 1   | NOTE 5 | 1    |                |
| 1   | BODY            | NOTE 1   | NOTE 2 | 1    |                |
| NO. | DESCRIPTION     | MATERIAL | FINISH | Q'TY | DRAWING NO.    |

| DIMENSIONS ARE IN MILLIMETERS         |     |       |    |  |
|---------------------------------------|-----|-------|----|--|
| UNLESS OTHERWISE SPECIFIED TOLERANCES |     |       |    |  |
| 0.5-6                                 | =   | ±0.2  |    |  |
| 6-30                                  | =   | ±0.4  |    |  |
| 30-120                                | =   | ±0.6  |    |  |
| 120-315                               | =   | ±1    |    |  |
| 315-1000                              | =   | ±1.6  |    |  |
| 1000-2000                             | =   | ±2.4  |    |  |
| SCALE                                 | 3/1 | ISSUE | C1 |  |

| PART NO. |                |
|----------|----------------|
| APPROVED | DATE 08-02-'22 |
| CHECKED  | DATE 08-02-'22 |
| DRAWN    | DATE 08-02-'22 |

| G.L.I.      |                                           |
|-------------|-------------------------------------------|
| TITLE       | BNC 75 OHM BULKHEAD RECEPT. ISOLATED JACK |
| DRAWING NO. | 900-6651B2-75                             |
| FILE NO.    | R:\D\DWG\900\6651B2\75-C1                 |